



Office of Application and Exam. Complete Specification Oct. 22, 1932.  
No. 439743.  
Application made in United States of America (No. 125188) on Nov. 2, 1932.  
Complete Specification Published July 7, 1933.  
© Copy Copyright 1933.

Index in abstract:—83 P  
Int. Cl.—B 85

COMPLETE SPECIFICATION

Dispensing Head for Aerosol Containers

WE, STEVENS DUNN INC., a corporation organized under the laws of the State of Delaware, United States of America, of 1450 Broadway, New York, State of New York, United States of America, do hereby declare the invention for which we pray that a patent may be granted to us and the method by which it is to be performed to be particularly described in and by the following statement:—

This invention relates to a dispensing head in the form of a cover cap for co-operating with the valve stem of a pressurized aerosol container for the administration of therapeutic agents in the form of a vapor or fine mist, and including means whereby the vapor may be readily applied as desired by the user, the cover cap being constructed to be used as a cap and protector for the valve stem of the aerosol container when the device is not in use so that it is easily carried in pocket or purse without appreciable danger of leakage or accidental activation.

It is the desirable to provide the cap with an adjustable air passage only when an aerosol is dispensed for relieving aches.

It is also desired the dispensing head to cooperate as a seal with the part of the cap, such as in the apparatus shown in our British patent No. 241,945, but at the same time the aerosol valve is protected, scratched and dented by the dispensing head in valve stem is dismantled, and the dispensing head may always be engaged with the valve stem of the aerosol container.

In accordance with the present invention there is provided a dispensing head for an aerosol container charged with a self-propelling liquid composition and equipped with an inwardly depressible and axially valve stem, said head comprising a cylindrical body member adapted to fit on the container, a delivery tube shaped for administration of the aerosol contents to the end cavity of the case, an air inlet permitting mixing of air

with the aerosol contents within the delivery tube, said delivery tube being substantially axially and being formed as an integral part of the cylindrical body member and mounted substantially perpendicularly thereon, a depressible baffle elastically positioned within the cylindrical body member to move axially thereof so as to engage said valve stem for depressing the latter, said baffle being maintained in normal inoperative position by the resilient action of said stem, said air inlet comprising an opening in the cylindrical body member through which a portion of said depressible baffle extends, the depressible baffle normally closing said air inlet but opening the same upon being depressed.

Reference is made to the accompanying drawings illustrating a specific embodiment of the invention in which:

Fig. 1 is a perspective view illustrating the device with the cover cap in place;

Fig. 2 is a sectional view through the device showing the construction thereof;

Fig. 3 is a partial view similar to Fig. 2 but showing the valve depressed;

Fig. 4 is a plan view, looking in the direction of arrow 4 in Fig. 2;

Fig. 5 is a plan view on an enlarged scale of the cap of the depressible baffle, and

Fig. 6 is a baffle plan view thereof.

For the purpose of illustrating the invention, the same is shown in Figs. 1 and 2 as being applied to an aerosol container 10, as shown in Fig. 2, the aerosol container is provided with a tapered neck portion 12 or other form which supports the depressible valve stem 14 and is so well known in the art when the valve stem is passed inwardly in the direction of the arrow 16, a spray will be emitted from the end of the valve stem 14 in the usual manner.

The aerosol container can be of the inverting type or it can be a continuous type as desired.

The dispensing head which comprises the subject matter of the present invention is

FIG. 1

generally indicated by the reference numeral 11. In the first place there is generally cylindrical body member 20 having an inwardly directed flange in the form of a flat top 22 with a generally annular opening therein indicated at 24 and this opening functions as a depressible baffle 26 as is hereinafter described. At the end opposite the flat top 22 the body member 20 is open and the dispensing head is substantially permanently over the tapered neck portion 12 of the container 10.

The cylindrical member 20 has a delivery tube in the form of a right-angled cylindrical portion 28 integral therewith and this is provided with a reduced mouth portion 30 for the fitting fit reception of a closure cap 32. The cylindrical portion 28 rises however at its top portion thereof above the flat top 22 so it clearly shows in Figs. 1 and 2 and is joined to cylindrical member 20 along curved lines 34 (see Fig. 1). An inclined surface 36 extends well above the flat top 22 and closes the part of portion 28 above top 22.

Referring more particularly now to the construction of the baffle 26, it will be seen that this is provided at its upper end with an inclined or beveled wall 38 which when the baffle is in its raised position about against a similarly inclined or beveled wall 40 forming a part of the edge of the opening 24. This accommodates the wall at 38 of baffle 26 and also in effect forms an upper stop 42. The inclined walls at 38 and 40 have frustoconical surfaces radiating to a common axis (see particularly Fig. 6) and the baffle has a flat forward edge 44 which extends down to a shelf 46 (see Figs. 2 and 3). Below the shelf 46 the baffle 26 is generally cylindrical in shape and continues to the inside surface of the member 20, this inside surface being indicated at 48 in Fig. 3 and the baffle 26 is adapted to ride up and down in this cylinder. The fit surface at 48 rides along a flat surface at 50 which forms the forward edge of the opening 24 so that the baffle is always in correctly aligned position with respect to the rest of the head.

It is particularly pointed out that in its inoperative position the top surface or flange 22 of the baffle 26 accurately engages the top surface of 54 of the projection of the delivery tube 28 so that the baffle 26 although capable of being purposely pushed down in the direction of arrow 16 and as indicated in Fig. 3, will not be so moved axially because of the fact that the projection of the cylindrical portion 28 riding on the surface 54 acts as a guard against this action.

The baffle 26 is tapered below but it has a shelf portion 52 (see particularly Fig. 2), and in this shelf portion there is a passage at 60 having an outer edge which matches the case 14 preferably with a close fit. However, the passage 60 communicates with an apertured passage 64 in an angle thereon forming the spray orifice. When the baffle is in the down position (Fig. 3), a spray is ejected from the apertured center of the cylindrical delivery tube 28 and when this occurs it will be seen that an adequate air passage 64 is provided because the inclined surface 38 of the baffle 26 drops away from the inclined surface 40 in the top portion of the cylindrical member 20.

WHAT WE CLAIM IS:—


1. A dispensing head for an aerosol container charged with a self-propelling liquid composition and equipped with an inwardly depressible and axially valve stem, said head comprising a cylindrical body member adapted to fit on the container, a delivery tube shaped for administration of the aerosol contents to the end cavity of the case, an air inlet permitting mixing of air with the aerosol contents within the delivery tube, said delivery tube being substantially axially and being formed as an integral part of the cylindrical body member and mounted substantially perpendicularly thereon, a depressible baffle elastically positioned within the cylindrical body member to move axially thereof so as to engage said valve stem for depressing the latter, said baffle being maintained in normal inoperative position by the resilient action of said stem, said air inlet comprising an opening in the cylindrical body member through which a portion of said depressible baffle extends, the depressible baffle normally closing said air inlet but opening the same upon being depressed.

2. A dispensing head according to claim 1, in which the air inlet is defined by an inwardly directed flange on the cylindrical body member, said flange having an inclined wall, and a correspondingly inclined wall on the baffle, said inclined walls being engaged in the normal inoperative position of said baffle but providing the air inlet upon depression of said baffle.

3. A dispensing head according to claim 2, in which the inwardly directed wall has frustoconical surfaces.

4. A dispensing head according to any one of the preceding claims, which comprises a finger piece on said depressible baffle normally extending into close proximity with the top surface of a projection of the delivery tube.

5. A dispensing head according to any one of the preceding claims, which includes a closure cap adapted for reception on the mouth portion of the delivery tube.

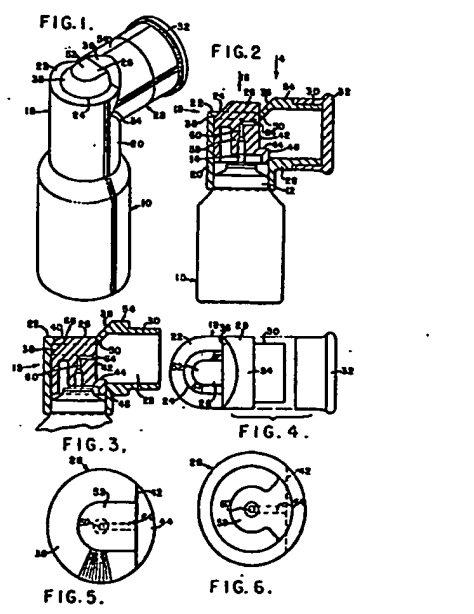

7. A dispensing head according to any one of the preceding claims, positioned on a tapered neck portion of an aerosol container so as to be substantially permanently fitted on said neck portion with the depressible baffle engaging the valve stem of the aerosol container.

8. A dispensing head for an aerosol container substantially as herein described with reference to the accompanying drawings, so as to be substantially permanently fitted on said neck portion with the depressible baffle engaging the valve stem of the aerosol container.

CHARLES FRANK ALGER, Attorney for the Applicant.

Landscape: Seen: Printed for the Applicant's Stationery Office by the Central Press—1933.  
Published at the Patent Office, 25, Southampton Buildings, London, W.C.2, from which copies may be obtained.